


## Charger Assemblies

Probe charging stations for oven-side and table-top mounting.




**Charger Assy, 4-Probe, Side  
Oven Mtg**

|     |        |
|-----|--------|
| P/N | TP2919 |
|-----|--------|

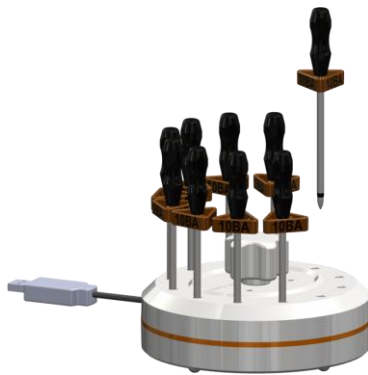

**Charger Assy, 12-Probe  
Circular Table-Top**

|     |        |
|-----|--------|
| P/N | TP2900 |
|-----|--------|

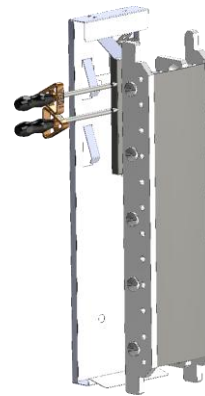

**Charger Assy, 12-Probe  
Linear Side Oven Mtg**

|     |        |
|-----|--------|
| P/N | TP2883 |
|-----|--------|

### Key Features

- 4-probe charger has a hinged door for contact cleaning
- Round charger disassembles with center knob for submersion cleaning
- Linear Charger snaps out of a receiving bracket for submersion cleaning

### Specifications

|                      |                              |
|----------------------|------------------------------|
| <b>Input</b>         | USB 5VDC, 2.1A minimum       |
| <b>Output</b>        | 2.4 VDC for probes           |
| <b>Materials</b>     | ASA, Acetal, stainless-steel |
| <b>Environmental</b> | RoHS, REACH                  |

### Size & Weight

|               | TP2919                                | TP2900                                     | TP2883                                  |
|---------------|---------------------------------------|--------------------------------------------|-----------------------------------------|
| <b>Size</b>   | 89 x 75 x 41 mm<br>(3.5 x 3 x 1.6 in) | 134 mm OD x 64 mm<br>(5.25 in OD x 2.5 in) | 320 x 76 x 38 mm<br>(12.5 x 3 x 1.5 in) |
| <b>Weight</b> | 126 g (4.4 oz)                        | 372 g (13.2 oz)                            | 518 g (1.2 lb)                          |

Specifications subject to change without notice.